


FASENFRÄSEN von Vieleck- und Rundmaterial

Spanntech by System KOPAL

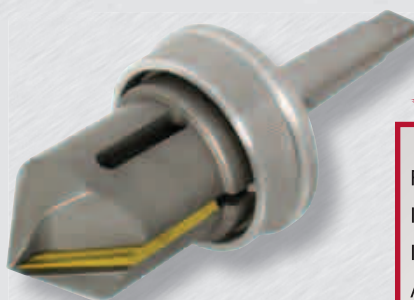

FASENFRÄSEN

- Fasenfräsenprinzip
- Innenfaser
- Innenfaser - Slim Line
- Aussenfaser
- Fasenfräser für Rohre - KOPAL Tube
- Ersatzteile
- Ersatz-Messer

Führungskegel

für Gerät

Innen	Best. Nr.
2-18 90°	01-510
2-18 60°	01-520
2-18 82°	01-530
2-42 90°	01-550
2-42 60°	01-555
2-42 82°	01-560
2-42 120°	01-570
20-60 90°	01-575
20-60 60°	01-580
40-80 90°	01-590
40-80 60°	01-595
60-100 90°	01-605
80-120 90°	01-620

für Gerät

Innen Slim Line	Best. Nr.
3-19 90°	03-510
3-19 60°	03-515
10-30 90°	03-520
10-30 60°	03-525
4-42 90°	03-530

für Gerät

Außen	Best. Nr.
2-18 90°	02-510
2-18 60°	02-515
2-36 90°	02-520
2-36 60°	02-525
10-46 90°	02-535
10-46 60°	02-540
20-60 90°	02-550
20-60 60°	02-555
40-80 90°	02-565
40-80 60°	02-570
60-100 90°	02-580
80-120 90°	02-595

Mutter

für Gerät

Innen, Außen	Best. Nr.
2-18	01-750
2-42	01-760
20-60	01-770
40-80	01-775
60-100	01-780
80-120	01-785

Innen Slim Line

3-19	03-610
10-30	03-615
4-42	03-620

Gegenmutter

für Gerät

Innen, Außen	Best. Nr.
2-18	01-755
2-42	01-765
20-60	
Innen Slim Line	
3-19	03-611

Feder

für Gerät

Innen, Außen	Best. Nr.
2-18	01-820
2-42	01-825
20-60	01-830
40-80	01-835
60-100	01-837
Innen Slim Line	
4-42	03-645
10-30	03-640

Körper

für Gerät

Innen	Best. Nr.
2-18 90° Befest. Cyl.	01-630
2-18 90° Befest. CM 1	01-635
2-18 60° Befest. Cyl.	01-640
2-18 60° Befest. CM 1	01-645
2-42 90° Befest. CM 1	01-650
2-42 90° Befest. CM 2	01-651
2-42 90° Befest. CM 3	01-652
2-42 90° Befest. Ø 10-16	01-655
2-42 90° Befest. Ø 12,7	01-660
2-42 60° Befest. CM 2	01-676
2-42 60° Befest. CM 3	01-677
2-42 60° Befest. Ø 12,7	01-685
20-60 90° Befest. CM 2	01-690
20-60 60° Befest. CM 2	01-695

für Gerät

Innen Slim Line	Best. Nr.
3-19 90°	
3-19 60° Befest. Ø 10	03-555
10-30 90°	
10-30 60° Befest. CM 2	03-561
4-42 90° Befest. CM 2	03-576

für Gerät

Außen	Best. Nr.
2-36 90° Befest. CM 2	02-610
2-36 90° Befest. Ø 10-16	02-615
10-46 90° Befest. CM 2	02-630
10-46 90° Befest. Ø 10-16	02-635
10-46 90° Befest. Ø 12,7	02-640
20-60 90° Befest. CM 2	02-645

